

BALL VALVES GB-10, GB15 & GB-16 SERIES


Gas/Fuel Shut-Off Valves GB-10 Series

CSA Gas Shut-Off Valves

Manual shut-off valves engineered specifically for low pressure gas service. Canadian Standard Association design and capacity certified with American-made quality. High-copper content body, chrome-plated ball, and PTFE seats.

FEATURES

- Complies with ANSI Z21.15, CR91-002, and ASME 16.44
- Use with natural, manufactured, mixed and liquefied petroleum gasses, LP gas-air mixtures
- Standard die-cast zinc "wing" handle, epoxy coated, for easy shut-off
- Temperature range: 32°F - 125°F at pressures of 1/2 and 5 psig
- Lever (-L1) or tee handle (-T1)

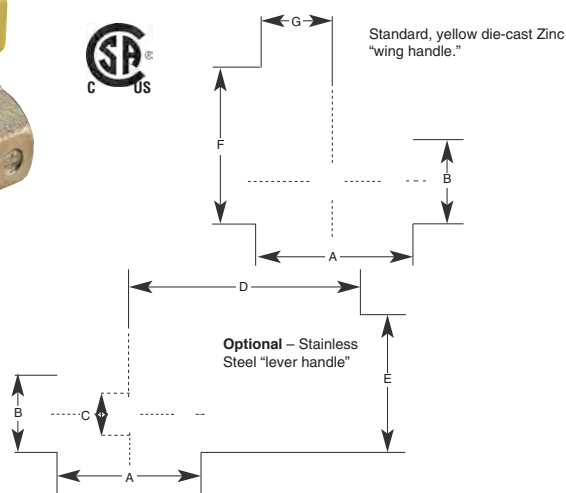

Model Number	Size (in.)	Connection	BTU/Hr*
51GB201	3/8	3/8 NPT	318,700
51GB301	1/2	1/2 NPT	623,750
51GB401	3/4	3/4 NPT	1,265,000
51GB501	1	1 NPT	2,037,500

* Capacity based on a gas having a heating value of 1000 Btu/cubic feet and an S.G. of 0.64 at a P.D. of 1" W.C.

Size (in.)	Dimensions (in.)						
	A	B	C	D	E	F	G
3/8	2.04	1.06	0.38	3.85	2.24	2.20	0.81
1/2	2.24	1.18	0.50	3.85	2.30	2.24	0.81
3/4	2.97	1.55	0.69	4.75	2.85	2.90	1.00
1	3.33	1.81	0.88	4.75	3.10	3.15	1.00

Gas Appliance Ball Valves (International) GB-15 & GB-16 Series

Gas Ball Valve

Designed for natural gas, manufactured and mixed gas, liquified petroleum gases and LP gas-air mixture applications. They comply with the latest editions of the standards listed in "Features."



GB-15



GB-16



FEATURES

- ANSI Z21.15, CGA9.1
- ASME B16.44
- UL Guide YRBX
- UL Guide MHKZ
- UL Guide YRPV
- UL Guide YSDT

Model Number	Part Number	Size & End Connection (in.)
GB-15	51GF301	1/2 FNPT x 1/2 FNPT
GB-15	51GF401	3/4 FNPT x 3/4 FNPT
GB-16	51GG201	1/2 FNPT x 3/8 Flare
GB-16	51GG301	1/2 FNPT x 1/2 Flare